

# Citrix Ready Workspace Hub RX420 (IGEL) Powered by IGEL OS

## RX420 (IGEL) Features

- Built-in 5GHz & 2.4GHz 802.11 b/g/ ac Wi-Fi
- Citrix Ready HDX optimized
- Easy, efficient enterprise management & control
- Chromium browser
- Native dual display with 4K resolution support
- Skype for Business optimization with RTME support
- Citrix Casting and proximity authentication support
- Optimized for GPU offloading
- Resolution up to 4K@60Hz single display or 4k@30Hz dual display
- 2 USB 3.0 and 2 USB 2.0 highspeed ports with transparent USB redirection
- 802.1x (PEAP, EAP-TLS, EAP-TTLS) support
- 16 GB internal Micro SD card and 2GB RAM
- Built-in Kensington security slot and sealed micro SD card for added protection
- Less than 10W power consumption
- Power button with sleep mode
- VESA mount kit included
- Embedded IGEL OS with 30 days starter license\*

\*RX420 (IGEL) requires a license for IGEL Workspace Edition which includes IGEL OS, IGEL Universal Management Suite software, multimedia codecs and a high availability option. The IGEL OS license is portable to other devices. Different support options are available.

## HDX Optimized Thin Clients for Enterprises + Support for Native Dual Displays and 5GHz WiFi Deployment

The RX420 (IGEL) thin client is built on the Raspberry Pi 4 platform, fully optimized for Citrix HDX Ready integration achieving compelling performance, running the IGEL OS operating system. With native dual monitor support, integrated enterprise-level device management software, built-in Ethernet & WiFi, the RX420 (IGEL) delivers outstanding performance and flexibility to deliver a purpose-built desktop virtualization solution for Citrix enterprise customers.

For organizations looking to broaden their commitments to Citrix virtual apps and desktops, the new *NComputing* RX420 (IGEL) thin clients for Citrix HDX deliver 100% of the HDX experience at a fraction of the cost of PCs or other thin clients.




## Optimized for Citrix HDX

The quadcore Broadcom 2711 (ARM v8) 64-bit system-on-chip provides the 4K dual display resolution demanded in today's environments while still using less than 10 watts of power. The RX420 (IGEL) incorporates full client-side rendering for efficient playback of video content, including browser content redirection support and server-side rendering for flash video playback.


## Secure from end to end

IGEL OS offers a complete "chain of trust" from the boot-loader process to the destination server/cloud. It ensures all components of a Citrix workspace scenario are secure and trustworthy. Each component within the initial boot process checks the cryptographic signature of the next.

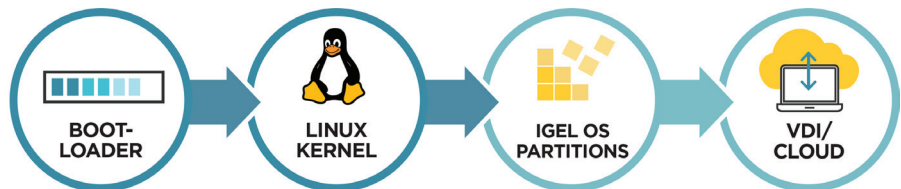

## Easy, efficient enterprise management & control

The IGEL Universal Management Suite and its simple yet powerful user interface makes it easy for a non-expert to control and manage from just a few to up to 300,000 connected devices with minimal training. Simplify typical management tasks such as firmware updates, configuration changes, and device resets, even in hybrid environments.

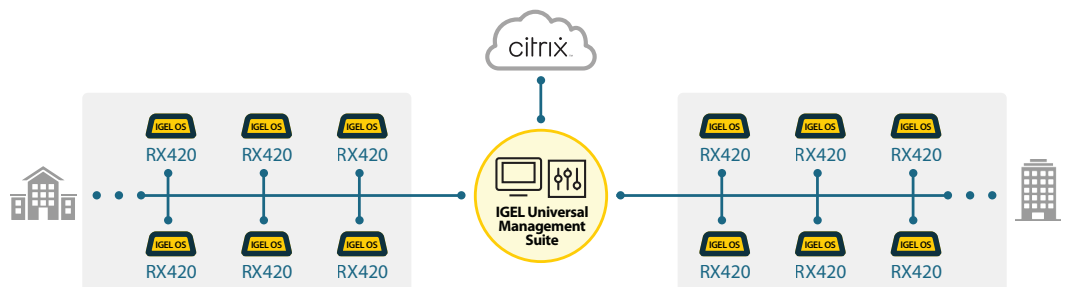

# RX420 (IGEL)

## Citrix HUB and Proximity Authentication Support

Employee productivity gets a boost with Citrix Casting, allowing users to securely and seamlessly move their virtual app and desktop sessions from mobile devices to the RX420 (IGEL) Citrix Ready Workspace Hub running in the Chromium browser.

### Supported Citrix Environments:

- Citrix Workspace App 20.06 or newer
- Citrix Workspace Hub\*

\* Early-access test device firmware may not include all features of the final release, and should be updated with GA firmware when released.

## Native Dual Monitor Support

Two micro-HDMI ports support either a single display with resolutions up to 4K@60Hz or dual display configurations of up to 4k@30Hz.



## Skype for Business Optimization

Deliver high-definition audio-video conferencing with HDX Real-Time Media Engine support. Seamlessly participate in audio-video or audio-only calls with other HDX RTME users, Skype for Business, and other standards-based video and conference room systems.

## Broad USB Peripheral Support

USB devices are transparently redirected, supporting mass storage, printers, scanners, smart card readers, headsets/speakers, webcams, COM ports, and 3D mice. Network-connected printers are also available to Citrix sessions.

### RX420 (IGEL) Connections

1. Power button with sleep mode for additional power savings (on top)
2. 2 USB 3.0 and 2 USB 2.0 High-Speed ports with full USB redirection support (2 required for mouse and keyboard)
3. Gigabit Ethernet RJ45 port
4. Kensington security port
5. Power in (USB-C)
6. Dual micro HDMI video output
7. 16bit/44kHz/Stereo high-quality audio jack



HARDWARE	DESCRIPTION
<b>KIT CONTENTS</b>	Each RX420 (IGEL) kit includes 1 access device, 1 power supply, 1 internal 16 GB SD card, 1 VESA mount kit and a Quick Installation Guide.
<b>SIZE</b>	Width: 76 mm / 3 inches, Depth: 93 mm / 3.7 inches, Height : 30 mm /1.2 inches
<b>WEIGHT</b>	105g / 0.23 lbs. Shipping weight (includes power adapter, packaging, document): 0.33kg / 0.72 lbs
<b>POWER SUPPLY</b>	5.0VDC (3A) power supply included
<b>POWER CONSUMPTION</b>	10W max (independent of external USB devices)
<b>LED INDICATORS</b>	Power, network link, and network activity
<b>DISPLAY</b>	Dual micro-HDMI video ports supporting resolutions up to 4K @ 60Hz single display or 4K@30Hz dual display
<b>VIDEO</b>	<ul style="list-style-type: none"> <li>• Full HD 1080P with H.264 support, in session (client-side rendering with hardware acceleration)</li> <li>• Full HD Flash video 1080P support (server-side rendering)</li> </ul>
<b>SOC</b>	Broadcom BCM2711, 1.5GHz 64bit Quad Core Cortex A72 Dual core VideoCore IV, Multimedia Processor
<b>MEMORY</b>	<ul style="list-style-type: none"> <li>• Mass storage: 16 GB internal Micro SD card</li> <li>• RAM: 2GB</li> </ul>
<b>MONITOR POWER-SAVE</b>	Sleep mode button to turn off display output for power saving mode
<b>NETWORK AND CONNECTIVITY</b>	<ul style="list-style-type: none"> <li>• Gigabit Ethernet RJ45 port</li> <li>• Wi-Fi (5GHz and 2.4 GHz 802.11 b/g/ac)</li> <li>• Bluetooth 5, BLE</li> </ul>
<b>AUDIO</b>	16-bit/44kHz/Stereo high quality digital audio with support for USB2.0 audio devices or via 3.5mm stereo audio jacks for headphone
<b>PERIPHERAL SUPPORT</b>	2 USB 3.0 and 2 USB 2.0 high-speed ports with transparent USB redirection
<b>WARRANTY</b>	1 year hardware warranty included; Optional extended hardware warranty available
<b>MOUNT OPTIONS</b>	VESA mount included
<b>CABLE OPTIONS</b>	<b>RX420 Micro-HDMI cable Kit:</b> (SKU 700-0035) 2 sets of 1.2 M Micro-HDMI cables <b>RX420 Micro-HDMI adapter kit:</b> (SKU 700-0034) 2 sets of 15cm Micro-HDMI to HDMI adapter dongles

RX-series products are RoHS compliant and have been EMI certified according to FCC, CE, BIS and KC standards.